



PQ PUMP RANGE

PQ01/2/A/150

MGE's PQ range of pumps has superceded the previous DQ series (DQ6 and DQ8). This series of pumps offers a comprehensive range of flow rates and are available in single or 3-phase. They can be supplied with varying imersion depths of up to 410mm and in single or multi-stage configurations and all pumps are supplied with a stainless steel intake strainer as standard.

The PQ series of centrifugal pumps are suitable for a wide variety of industrial fluids and conform to pump configuration standard DIN 5440 and the electric motor standard EN 60034.

The PQ01/2/A/150 pump is one of several standard pump configurations in this series and is detailed below.

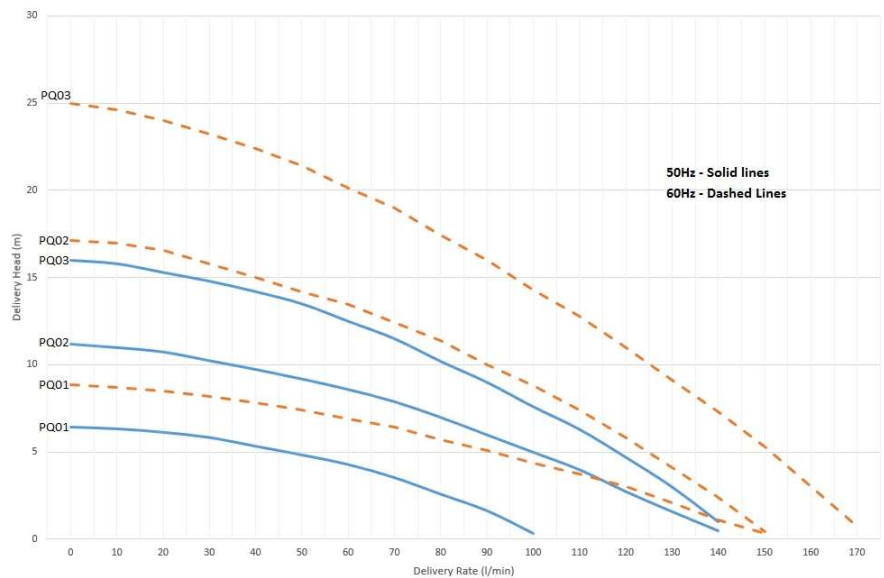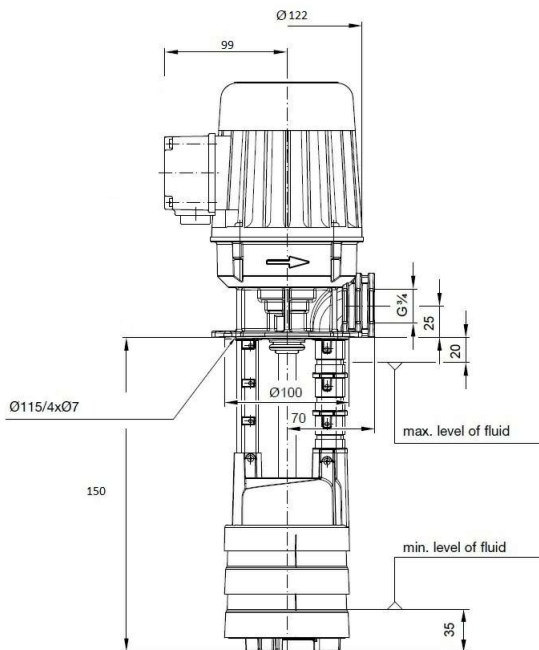

MECHANICAL SPECIFICATIONS

PQ01/2/A/150 Vertical Circulation Pump	
Component	Material
Flange	POM
Base	PPS
Shaft	Stainless Steel 1.4122
Impellor	POM
Diffuser	PP
Intermediate Chamber	PPS
Bearings	Deep Groove Ball Bearing with cover disc
Pump Bottom	PP
Elastomers	NBR

TECHNICAL SPECIFICATIONS

PQ01/2/A/150 Vertical Circulation Pump	
Product Category	Circulation Pump
Max Flow Rate	100 l/min.
Max Delivery Head	6.5 m
Immersion Depth	150 mm
No of Stages	Single Stage
Pressure Port Series	G 3/4
Weight	4 kg
Power Requirements	230/400v, 3ph, 50Hz 265/460v, 3ph, 60Hz



LIT100 Issue 2

MGE reserve the right to change, improve and/or modify all or any products manufactured and sold by us at anytime; this does not incur any obligation on our part to make like changes to any of our products previously sold.

MGE